


Nice

Era P Serie

Portable, to control awnings, blinds, rolling shutters and lights

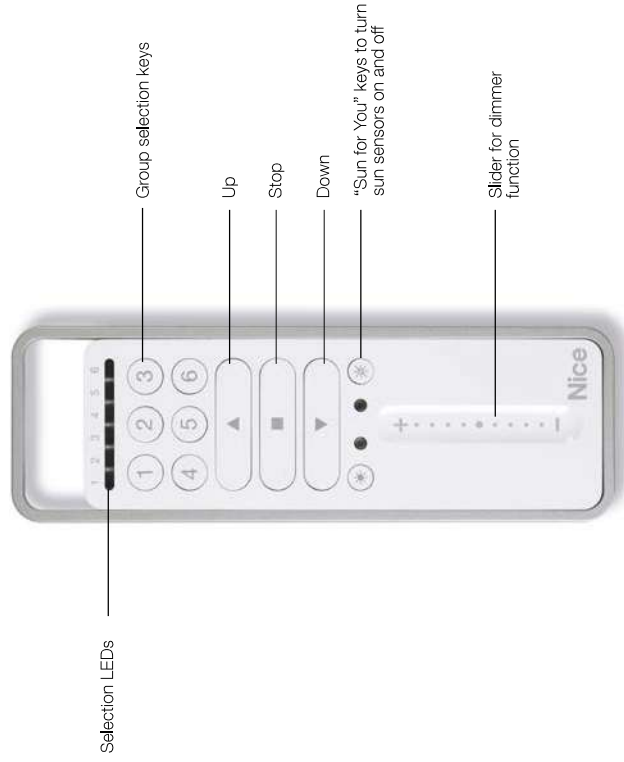

Portable radio transmitters to control awnings, blinds, rolling shutters and lights with ON/OFF function and slider dimmer.

1 and 6 channel versions, to manage up to 6 groups in single, group or multigroup mode, including with separate activation of climatic sensors. 433.92 MHz, rolling code with self-learning.

User friendly with ergonomic design.

Just a click for the right light at all times: the Sun for You control keys, with LED display, enable and disable reception of the automatic commands transmitted by the climatic sensors in the installation.

The Era P Varior version features a slider for analogue control of the dimmer function, adjusting the luminosity of the lights and speed of the Era Inn Edge motors.

Easy programming

The same transmitter can be programmed in a number of awnings or shutters to create groups.

The Memo Group function enables the last multigroup to be recalled. New **transmitters can be duplicated remotely and automatically** just by placing the new transmitter next to the one already programmed and pressing a key.

Extended autonomy

(two AAA 1.5 V alkaline batteries).

Long range 200 m in open space, 35 m indoors.

Comfort

Thanks to the presence of a slider, a simple touch is all it takes to easily adjust the slant of Venetian blinds ("Tilting" function) or bring sun awnings and rolling shutters to the position corresponding to the pressure point, from 0 to 100% of the travel ("Go To Position" function).





P1V



P1

P1S

P6


P6S

P6SV

Code	Description	Pcs./pack.
P1	Portable transmitter to control 1 electrical load system or automation group	1
P1S	Portable transmitter to control 1 electrical load system or automation group, with sun on/off keys	1
P6	Portable transmitter to control 6 electrical load systems or automation groups for activation in single or multigroup mode	1
P6S	Portable transmitter to control 6 electrical load systems or automation groups for activation in single or multigroup mode, with sun ON/OFF keys	1
P1V	Portable transmitter to control 1 electrical load system with slider dimmer or 1 automation group	1
P6SV	Portable transmitter to control 6 systems of electrical loads or automation groups for activation in single or multigroup mode, with slider dimmer and sun on/off keys	1



Easy and automatic duplication by simply placing the two transmitters near each other.

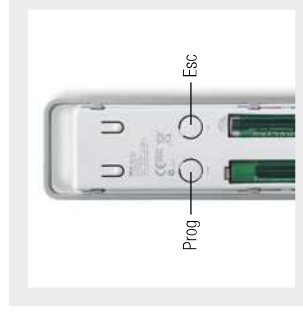

Intuitive programming procedure using the keys on the back of the transmitter.



Handy wall support as standard.

TECHNICAL SPECIFICATION

Code	P1, P1S, P6, P6S, P1V, P6SV
Power supply (Vdc)	Alkaline batteries - 2 x AAA x1.5 V
Battery lifetime	About 2 years with 10 transmissions per day
Frequency	433.92 MHz ± 100 KHz
Protection class (IP)	40 (Use in the home or in protected environments)
Average range (m)	Estimated average range 200 in open space, 35 indoors
Radio coding	Rolling code (0-code)
Operating temperature (°C Min/Max)	-5 - +55
Dimensions (mm)	49x150x14
Weight (g)	85